


Force cells

Cantilever Beam force cell

Type 410

The type 410 measures force with the cantilever beam by an integrated piezo-resistive wheatstone bridge with front-end amplification circuit.

It uses hybrid thick film technology which guarantees an excellent stability and a long operating life. The special design of the force cell ensure batch production and with fully automated assembly an ideal performance to cost ratio for high quantities.

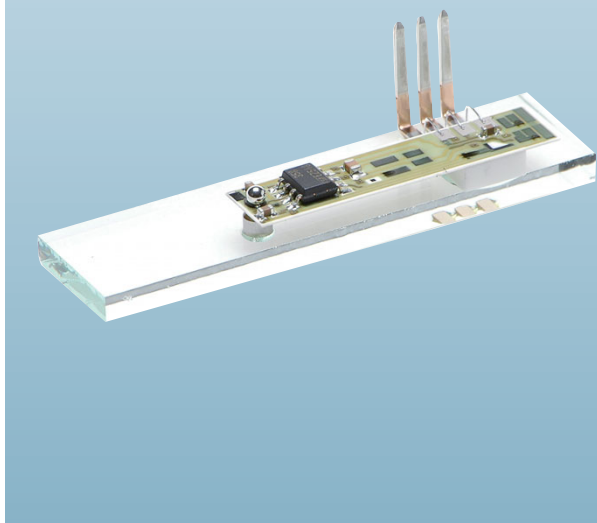

Measuring range
0 ... 53 – 265 Centi-Newton

- + Compact construction for a wide range of industrial applications
- + Ideal for OEM batches in high quantities
- + High resistance to temperatures
- + No mechanical aging
- + No mechanical creep

Technical overview

Measuring pressure

0 ... 53 – 265 Centi-Newton

Operating conditions

Temperature	Medium / ambient	0 ... +70 °C
	Storage	-10 ... +70 °C
Tolerable overload		< 1000 cN

Electrical overview

Output	The signal varies ratiometrically with supplied voltage.	
	The non-ratiometrical value of the output signal is with a change of power supply of $\pm 5\%$:	typ. 0.5 % fs max. 1.0 % fs
Power supply	Factory calibration	5 VDC
Load		$R_L \geq 50 \text{ k}\Omega$; $C_L \leq 10 \text{ nF}$
Current consumption	At 50 k Ω Load / 5 VDC power supply	< 3 mA
Electromagnetic compatibility	The product is designed exclusively for installation in equipment. The customer is responsible for CE conformity.	

Dynamic response

Response time	< 1 ms
Load cycle	< 1000 Hz

Protection standard

IP 00

Electrical connection

PIN connector, RAST 2.5

Mounting instruction

Fix the force sensor on the base plate (glass) ensuring there is no mechanical stress..


Weight

~ 7.1 g

Packaging

Multiple packaging in cardboard boxes with blister pack inserts (40 pcs¹⁾)

Dimensions in mm / Electrical connections

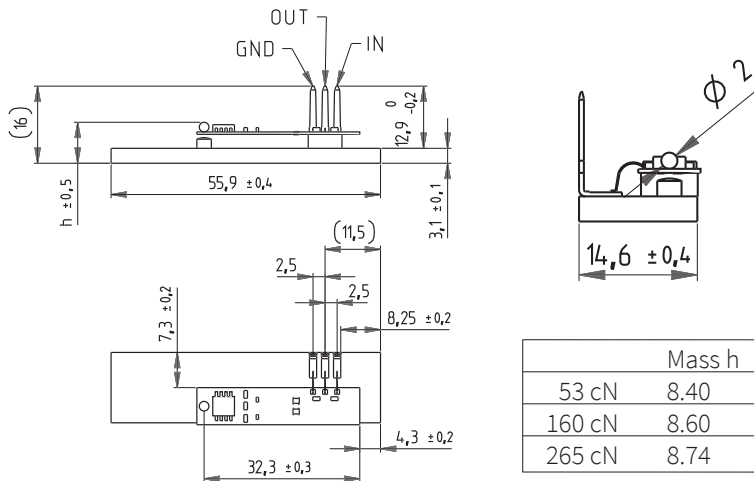

Accuracy

Parameter		Unit	
Tolerance zero point	max.	% fs	± 2.0
Tolerance full scale	max.	% fs	± 30.0
Resolution		% fs	0.1
Total of linearity, hysteresis and repeatability	max.	% fs	± 0.2
Long term stability acc. to DIN EN 60770		% fs	± 0.5
TC zero point ²⁾	max.	% fs/10K	± 0.3
TC sensitivity ²⁾	max.	% fs/10K	± 0.1

Order code selection table

		1	2	3	4	5
		410.	X	X	X	X
Measuring range	0 ... 53 cN	9	2			
	0 ... 160 cN	9	4			
	0 ... 265 cN	9	5			
Output / power supply	0.3 ... 2.8 V 5 VDC			1		
Electrical connection	PIN connection, RAST 2.5				1	
Compensation	With temperature compensated					1

¹⁾ Minimal order quantity

²⁾ TC = Temperature coefficient

Huba Control AG

Headquarters Schweiz
Industriestrasse 17
CH-5436 Würenlos
Telefon +41 56 436 82 00
Fax +41 56 436 82 82
info.ch@hubacontrol.com

Huba Control AG

Niederlassung Deutschland
Schlattgrabenstrasse 24
D-72141 Walddorfhäslach
Telefon +49 7127 2393 00
Fax +49 7127 2393 20
info.de@hubacontrol.com

Huba Control AG

Vestiging Nederland
Hamseweg 20A
NL-3828 AD-Hoogland
Telefoon +31 33 433 03 66
Telefax +31 33 433 03 77
info.nl@hubacontrol.com

Huba Control SA

Succursale France
Rue Lavoisier
Technopôle Forbach-Sud
F-57602 Forbach Cedex
Téléphone +33 3 87 84 73 00
Télécopieur +33 3 87 84 73 01
info.fr@hubacontrol.com

Huba Control AG

Branch Office United Kingdom
Unit 13 Berkshire House, County Park
Business Centre, Shivenham Road
Swindon - Wiltshire SN1 2NR
Phone +44 1993 77 66 67
Fax +44 1993 77 66 71
info.uk@hubacontrol.com

www.hubacontrol.com

