



Pressure transmitter

# Huba Control

## Relative and absolute pressure transmitter for shipbuilding

### Type 527

The compact type 527 pressure transmitter is based upon the well proven ceramic technology developed by Huba Control over 20 years ago.

These transmitters are suitable for applications across a broad spectrum of industries and shipbuilding.



**Pressure range**  
**0 ... 1 – 60 bar**

- + Compact, rugged construction
- + Negligible temperature influence on accuracy
- + Certified for shipbuilding with:
  - American Bureau of Shipping
  - Bureau Veritas
  - Det Norske Veritas Germanischer Lloyd
  - Lloyd`s Register

## Technical overview

### Pressure range

Relative	0 – 60 bar
Absolute	0 ... 1 – 16 bar

### Operating conditions

Medium	Liquids and gases	
Temperature	Medium	FPM -15 ... +125 °C (⊖) -15 ... +120 °C
		EPDM -40 ... +125 °C (⊖) -30 ... +120 °C
		NBR -20 ... +100 °C
	Ambient	-30 ... +85 °C (⊖) -25 ... +85 °C
	Storage	-50 ... +100 °C
Tolerable overload / Rupture pressure	≤ 4 bar	3.0 x fs
	> 4 bar	2.5 x fs

### Materials

Cover	Stainless steel 1.4404 / AISI 316L	
Plug accommodation	Polyarylamid 50% GF UL 94 V-0	
Materials in contact with medium	Pressure connection	Stainless steel 1.4404 / AISI 316L
	Sensor	Ceramic Al <sub>2</sub> O <sub>3</sub> (96%)
	Sealing material	FPM, EPDM, NBR

### Electrical overview

	Output	Power supply	Load	Current consumption
2 wire	4 ... 20 mA	7 ... 33 VDC	< $\frac{\text{supply voltage} - 7V}{0.02 A}$ [Ohm]	< 23 mA
	⊕ 4 ... 20 mA	10 ... 30 VDC	< $\frac{\text{supply voltage} - 10V}{0.02 A}$ [Ohm]	< 23 mA
3 wire	0 ... 10 V	12 ... 33 VDC	> 10 kOhm / < 100 nF	< 7 mA
Polarity reversal protection	Short circuit proof and protected against polarity reversal. Each connection is protected against crossover up to max. supply voltage.			
Insulation voltage			standard	500 VDC

### Dynamic response

Response time	< 2 ms, 1 ms typ.
Load cycle	< 100 Hz

### Electrical connection

	Protection standard	Protection class
Swift connector with or without cable 1.5 m (PVC spec.)	IP 67	III
Connector DIN EN 175301-803-A	IP 65	III
Connector M12x1	IP 67	III

### Pressure connection

Inside thread	$\frac{7}{16}$ - 20 UNF	
	$\frac{1}{2}$ - 14 NPT	
Outside thread	$\frac{7}{16}$ - 20 UNF	sealing cone 45°
	$\frac{1}{4}$ - 18 NPT	
	G $\frac{1}{4}$	sealed at back ISO 1179-2 (DIN 3852-E) with Profile seal ring in FPM (-30 ... +135 °C)
	G $\frac{1}{2}$	sealed at back and manometer (combi) with Profile seal ring in FPM (-30 ... +135 °C)
	M20x1.5	sealed at front and manometer (combi)
	G $\frac{1}{2}$	sealed at front

### Installation arrangement

Unrestricted	<b>Recommendation:</b> Pressure connection facing downwards
--------------	---

### Tests / Admissions

Electromagnetic compatibility	CE conformity acc. EN 61326-2-3
Shock acc. IEC 68-2-27	100 g, 11 ms half sine wave, all 6 directions, free fall from 1 m on concrete (6x)
Constant shock acc. IEC 68-2-29	40 g for 6 ms, 1000x all 3 directions
Vibration acc. IEC 68-2-6	20 g, 15 ... 2000 Hz, 15 ... 25 Hz with amplitude ± 15 mm, 1 Octave/min. all 3 directions, 50 constant load
Shipbuilding	American Bureau of Shipping (ABS)
	Bureau Veritas (BV)
	Det Norske Veritas Germanischer Lloyd (DNV GL)
EAC	Lloyd`s Register (LR)

### Protection against explosion

	<b>4 ... 20 mA</b>
Intrinsic safety «i» (with current output only)	Ex II 1/2 G Ex ia IIC T4 Ga/Gb Ex II 1/2 D Ex ia IIC T125°C Da/Db
EC type examination certificate	SEV 10 ATEX 0145
Connection to certified intrinsically safe resistive circuits with maximum values	U <sub>i</sub> = 30 VDC; I <sub>i</sub> = 100 mA = P <sub>i</sub> = 0.75 W
Effective internal inductance and capacitance for versions with plugs complying with EN 175301-803 or M12x1	L <sub>i</sub> = 0 nH; C <sub>i</sub> = 0 nF
IECEx	SEV 16.0007

### Weight

~ 90 g

### Packaging (Please state on order)

Single packaging in cardboard	accessories integrated
Multiple packaging in cardboard (25 pcs)	

## Accuracy

Test conditions: 25 °C, 45% RH, power supply 24 VDC

Parameter	Unit	
Characteristic line <sup>1)</sup>	% fs	± 0.3
Resolution	% fs	0.1
Thermal characteristic <sup>2)</sup>	max. % fs/10K	± 0.2
Long term stability acc. IEC EN 60770-1	max. % fs	± 0.25

<sup>1)</sup> typ. ; max. 0.5% fs (incl. zero point, full scale, linearity, hysteresis and repeatability)

<sup>2)</sup> -15 ... 85 °C

			1	2	3	4	5	6	7	8	9	10	11	
<b>Order code selection in bar</b>			527.	X	X	X	X	X	X	X	X	X	X	X
<b>Pressure mode</b>	Relative		9											
	Absolute		8											
<b>Pressure range <sup>1)</sup></b>	0 ... 1 bar			1	1									
	0 ... 1.6 bar			1	2									
	0 ... 2.5 bar			1	4									
	0 ... 4 bar			1	5									
	0 ... 6 bar			1	7									
	0 ... 10 bar			3	0									
	0 ... 16 bar			3	1									
	0 ... 25 bar		9	3	2									
	0 ... 40 bar		9	3	3									
	0 ... 60 bar		9	4	0									
<b>Sealing material</b>	FPM	Fluoro elastomer				0	0							
	EPDM	Ethylene propylene				1	0							
	NBR	Butadiene Acrylonitrile				2	0							
<b>Output / power supply</b>	0 ... 10 V	12 ... 33 VDC						2						
	4 ... 20 mA	7 ... 33 VDC						3						
		10 ... 30 VDC						4	1,3					
<b>Electrical connection</b>	Connector	DIN EN 175301-803-A <sup>2)</sup>									1			
		M12x1 <sup>2)</sup>	2w: IN=1 / OUT=3	3w: IN=1 / OUT=4 / GND=3							3			
		M12x1 <sup>2)</sup>	2w: IN=1 / OUT=4	3w: IN=1 / OUT=3 / GND=4							M			
		Swift connector with cable 1.5 m									L			
<b>Pressure connection</b>	Inside thread	7/16 - 20 UNF									K	1	1	
		1/2 - 14 NPT									D	1	1	
	Outside thread	7/16 - 20 UNF										2	1	1
		1/4 - 18 NPT										3	1	1
		G 1/4 sealed at back ISO 1179-2 (DIN 3852-E) with Profile seal ring in FPM										4	1	1
		G 1/2 sealed at back and manometer with Profile seal ring in FPM										8	1	1
	M20x1.5 sealed at front and manometer (combi)									E	1	1		
	G 1/2 sealed at front									9	1	1		
<b>Pressure range variation (optional)</b>	Indicate W and state range on order (e.g.: W0... + 3bar/OUT0...5V)													
														W

			1	2	3	4	5	6	7	8	9	10	11		
<b>Order code selection in psi</b>			527.	X	X	X	X	X	X	X	X	X	X	X	
<b>Pressure mode</b>	Relative		9												
	Absolute		8												
<b>Pressure range <sup>1)</sup></b>	0 ... 15 psi			B	1										
	0 ... 20 psi			B	2										
	0 ... 30 psi			B	4										
	0 ... 60 psi			B	5										
	0 ... 100 psi			B	7										
	0 ... 150 psi			C	0										
	0 ... 200 psi			C	1										
	0 ... 300 psi		9	C	2										
	0 ... 500 psi		9	C	3										
	0 ... 750 psi		9	D	0										
<b>Sealing material</b>	FPM	Fluoro elastomer				0	0								
	EPDM	Ethylene propylene				1	0								
	NBR	Butadiene Acrylonitrile				2	0								
<b>Output / power supply</b>	0 ... 10 V	12 ... 33 VDC						2							
	4 ... 20 mA	7 ... 33 VDC						3							
		10 ... 30 VDC						4	1,3						
<b>Electrical connection</b>	Connector	DIN EN 175301-803-A <sup>2)</sup>										1			
		M12x1 <sup>2)</sup>	2w: IN=1 / OUT=3	3w: IN=1 / OUT=4 / GND=3							3				
		M12x1 <sup>2)</sup>	2w: IN=1 / OUT=4	3w: IN=1 / OUT=3 / GND=4							M				
		Swift connector with cable 1.5 m									L				
<b>Pressure connection</b>	Inside thread	7/16 - 20 UNF										K	1	1	
		1/2 - 14 NPT										D	1	1	
	Outside thread	7/16 - 20 UNF											2	1	1
		1/4 - 18 NPT											3	1	1
		G 1/4 sealed at back ISO 1179-2 (DIN 3852-E) with Profile seal ring in FPM											4	1	1
		G 1/2 sealed at back and manometer with Profile seal ring in FPM											8	1	1
	M20x1.5 sealed at front and manometer (combi)										E	1	1		
	G 1/2 sealed at front										9	1	1		
<b>Pressure range variation (optional)</b>	Indicate W and state range on order (e.g.: W0... + 16psi/OUT0...5V)														
														W	


<sup>1)</sup> Other pressure ranges on request

<sup>2)</sup> Delivery without female connector


Order code selection in MPa		1	2	3	4	5	6	7	8	9	10	11		
		527. X X X X X X X X X X X X												
Pressure mode	Relative	9												
	Absolute	8												
Pressure range <sup>1)</sup>	0 ... 0.1 MPa		G	1										
	0 ... 0.16 MPa		G	2										
	0 ... 0.25 MPa		G	4										
	0 ... 0.4 MPa		G	5										
	0 ... 0.6 MPa		G	7										
	0 ... 1 MPa		H	0										
	0 ... 1.6 MPa		H	1										
	0 ... 2.5 MPa	9	H	2										
	0 ... 4 MPa	9	H	3										
	0 ... 6 MPa	9	K	0										
Sealing material	FPM Fluoro elastomer				0	0								
	EPDM Ethylene propylene				1	0								
	NBR Butadiene Acrylonitrile				2	0								
Output / power supply	0 ... 10 V 12 ... 33 VDC							2						
	4 ... 20 mA 7 ... 33 VDC							3						
	10 ... 30 VDC Ex protection							4	1,3					
Electrical connection	Connector													
	M12x1 <sup>2)</sup> 2w: IN=1 / OUT=3 3w: IN=1 / OUT=4 / GND=3									1				
	M12x1 <sup>2)</sup> 2w: IN=1 / OUT=4 3w: IN=1 / OUT=3 / GND=4									3				
	Swift connector with cable 1.5 m									M				
Pressure connection	Inside thread	7/16" - 20 UNF								K	1	1		
		1/2" - 14 NPT								D	1	1		
	Outside thread	7/16" - 20 UNF									2	1	1	
		1/4" - 18 NPT									3	1	1	
		G 1/4 sealed at back ISO 1179-2 (DIN 3852-E) with Profile seal ring in FPM									4	1	1	
		G 1/2 sealed at back and manometer with Profile seal ring in FPM									8	1	1	
		M20x1.5 sealed at front and manometer (combi)									E	1	1	
		G 1/2 sealed at front									9	1	1	
		Pressure range variation (optional)	Indicate W and state range on order (e.g.: W0... +0.3MPa/OUT0...5V)											W

Accessories (supplied loose)	Order number
Female connector DIN EN 175301-803-A with seal	103510
Corner-wire box for connector M12x1	106975
Corner-wire box for connector M12x1 with cable 2.0 m	114604
Straight-wire box for connector M12x1	114570
Straight-wire box for connector M12x1 with cable 2.0 m	114605
Mounting bracket with screw	118716
Heat sink with outside thread G 1/2 sealed at front - inside thread G 1/2	105631
Heat sink with outside thread G 1/2 sealed at front - inside thread G 1/4	105073
Heat sink with outside thread G 1/4 sealed at front - inside thread G 1/4	105074
Calibration certificate	104551

Mounting bracket

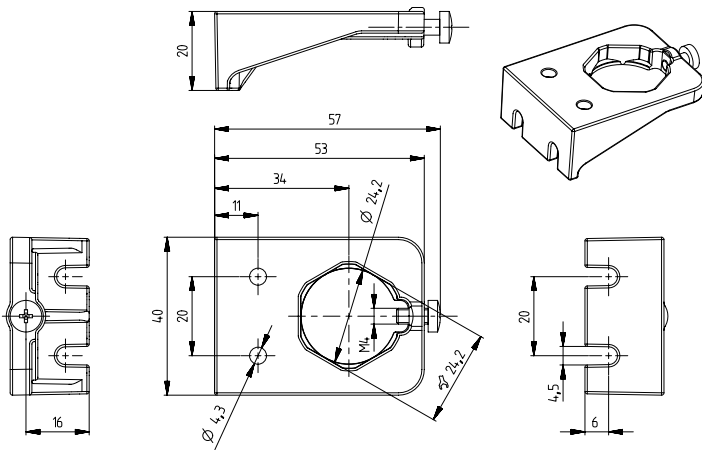


Heat sink

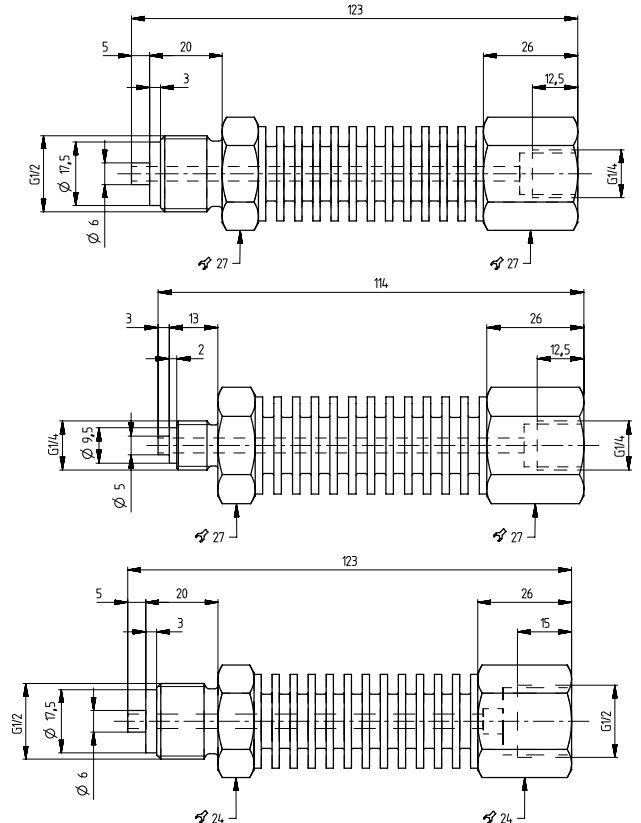


<sup>1)</sup> Other pressure ranges on request


<sup>2)</sup> Delivery without female connector

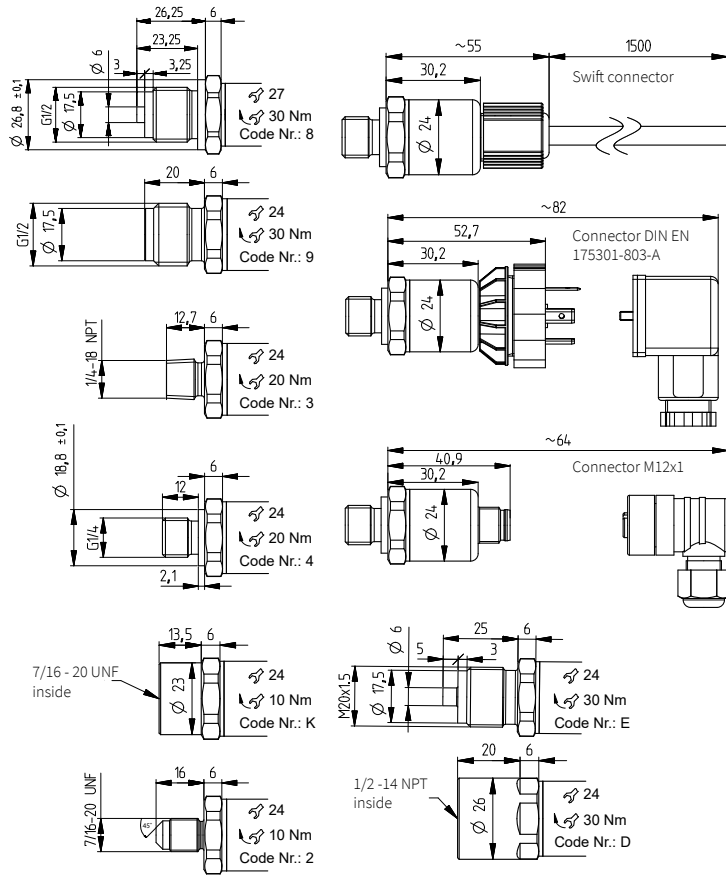


2 wire




1 (IN) 2 (OUT)



1 (IN) 2 (OUT)




1 (IN) 3 (OUT)




1 (IN) 4 (OUT)


3 wire




1 (IN) 2 (OUT) 3 (GND)



1 (IN) 2 (OUT) 3 (GND)



1 (IN) 4 (OUT) 3 (GND)




1 (IN) 3 (OUT) 4 (GND)




Device design with explosion protection: 4 ... 20 mA  
The grounding connection is conductively connected to the transmitter housing.

Connector DIN  
EN 175301-803-A

Connector M12x1



1 (IN) 2 (OUT) ↓



1 (IN) 3 (OUT) 4 (↓)

**Huba Control AG**

Industriestrasse 17  
5436 Würenlos, Switzerland  
Tel. +41 56 436 82 00  
[info.ch@hubacontrol.com](mailto:info.ch@hubacontrol.com)



Consultancy in your area  
[hubacontrol.com/en/worldwide](https://hubacontrol.com/en/worldwide)

